



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

19. 3. 02

The Patent Office

14 FEB 01 5605961-1 000354
P01/7700 0-00-0103600.3



The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference PJA/C088821PGB

2. Patent a **0103600.3**
(The Pat...

13 FEB 2001

3. Full name, address and postcode of the or of each applicant (underline all surnames)

CHARLES OWEN & CO. (BOW) LTD
ROYAL WORKS
HIGH STREET
JOHNSTOWN
WREXHAM
LL14 2BG

Patents ADP number (if you know it)

371583002

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

HELMET

5. Name of your agent (if you have one)

Marks & Clerk

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Sussex House
83-85 Mosley Street
Manchester
M2 3LG

Patents ADP number (if you know it)

18004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

| Country | Priority application number (if you know it) | Date of filing (day/month/year) |
|---------|-------------------------------------------------|------------------------------------|
|---------|-------------------------------------------------|------------------------------------|

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

| Number of earlier application | Date of filing (day/month/year) |
|-------------------------------|------------------------------------|
|-------------------------------|------------------------------------|

8. Is a statement of Inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

4

Claim(s)

1

Abstract

1

Drawing(s)

3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of Inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature..... Date 12/02/01
MARKS & CLERK

12. Name and daytime telephone number of person to contact in the United Kingdom.

MR P.J ALLMAN - 0161 233 5805

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Helmet.

This invention relates to helmets.

5 Riding helmets have long been employed to prevent or reduce head injuries to horse riders. Riding helmets typically comprise a hard outer shell that provides structural stability and resistance to physical impact, and a softer lining. This lining makes the helmet more comfortable for the wearer, whilst also cushioning the wearer against impacts to the outer shell of the helmet.

10

Riding helmets are normally fitted with a fastening strap that holds the helmet in place upon the head of the wearer, preventing the helmet being accidentally dislodged. These straps pass between points of attachment on the helmet and under the chin of the wearer.

15 In order that the strap may be stably secured to the helmet it is normal for the strap to be anchored to the hard outer shell, since this is the part of the helmet most able to resist deformation.

Given that the outer shell is spaced from the side of the wearer's head by the thickness of
20 the lining, if the strap is simply secured to the inner surface of the outer shell by, for example, a rivet the strap cannot lie flat against the wearer's head adjacent the lower edge of the helmet lining. Thus a triangular space is defined beneath the lower edge of the lining, the side of the wearer's head and the strap. This represents a hazard as a tree branch, for example, could become hooked beneath the strap if by chance the branch
25 passed through the triangular space. If a tree branch did become hooked beneath the strap the wearer would be exposed to the risk of severe injury.

The above problem has been appreciated in the past and has been addressed by producing helmets in which the straps extend from their points of attachment on the outer shell and
30 through the lining such that the strap extends around the wearer's head from the inner side of the lower edge of the lining. The strap then lies flat adjacent the wearer's head, reducing the risk of the strap becoming hooked on, for example, a tree branch.

Unfortunately, such an arrangement is relatively complicated and is difficult to manufacture, as the strap cannot be attached to the outer shell before addition of the lining.

5 According to the present invention there is provided a helmet having an outer shell defining an inwardly facing surface extending to an edge of the shell, a lining defining an outer surface facing the inwardly facing surface of the shell, an inner surface which in use faces the head of a person wearing the helmet, and an edge surface extending between the inner and outer surfaces of the lining adjacent the edge of the shell, a strap secured to the
10 outer shell and extending from between the inwardly facing surface of the outer shell and the outer surface of the lining, and means for releasably attaching a portion of the strap immediately adjacent the lining to the edge surface of the lining, such that the strap adjacent the shell edge is pulled towards the head of the wearer.

15 A helmet according to the invention confers upon its wearer the advantage that it greatly reduces the risk of the strap becoming snagged on passing obstacles. Thus there is a reduced risk of injury to the rider. This advantage arises because the profile of the strap is induced to conform better to the shape of the wearer's face. As a result of this the gap between the wearer's face and the strap is reduced and hence there is a smaller area into
20 which objects may become inserted and entangled.

Suitable means for attaching the strap to the edge surface of the lining according to the invention include fastenings such as hook and loop fastenings and press-stud fastenings. The use of releasable attaching means ensures that, should the strap become entangled
25 with another object, and cause the detachment of the strap from the lining of the helmet, the strap may simply be brought back into engagement with the lining without requiring repair of the helmet.

The outer shell and lining of the helmet may cover the entire outer surface of the lining,
30 or alternatively the shell and lining may be somewhat differently sized. For example the lining of the helmet may protrude from beneath the outer shell by a distance of approximately 30mm.

The invention will now be described by way of example with reference to the accompanying drawings in which:

5 Figure 1 represents a known helmet with the strap unfastened;

Figure 2 represents the helmet of figure 1 with the strap fastened;

Figure 3 represents a helmet according to the present invention with the strap unfastened;

10

Figure 4 represents the helmet of figure 3 with the strap fastened; and

Figure 5 represents a helmet according to a second embodiment of the invention, with the strap fastened.

15

Turning to figure 1, the helmet comprises a hard outer shell 1, which is bounded by a beaded edge 2. A lining 3 is received within the shell 1, such that an outer surface 4 of the lining 3 faces an inner surface 5 of the outer shell 1. An inner surface 6 of the lining 3 is in contact with the head of a wearer 7. An edge surface 8 extends between the inner
20 and outer surfaces of the lining (6 and 4 respectively). A helmet strap 9 is secured to the outer shell 1 by a rivet 10, which passes through both outer shell 1 and strap 9. The strap 9 is positioned between the inner surface 5 of the outer shell 1 and the outer surface 4 of the lining 3. When the strap is unfastened it depends freely from a gap 11 between the outer shell 1 and the lining 3.

25

In figure 2 it can be seen that when the strap 9 is fastened so that it passes beneath the chin of the wearer 7 its profile relative to the head of the wearer 7 is such that it creates a generally triangular space 12 between the strap and the wearer's head. This space 12 represents a potential hazard as the branches of trees for instance may pass through the
30 space 12 to become hooked on the strap 9.

Figure 3 illustrates a helmet according to the invention, which differs from the helmet of figure 1 in the provision of a portion of a hook and loop type fastening 13 which is attached to the strap 9 adjacent the edge surface 8 of the lining 3, the edge surface 8 of the lining defining loops with which hooks on the fastening may engage.

5

In figure 4 the helmet of figure 3 is shown in use with the strap 9 fastened around the head of the wearer 7. The fastener portion 13 is engaged with the edge surface 8 of the lining 3 inducing the strap 9 to conform more closely to the profile of the wearer's head 7.

This greatly reduces the size of the space 12 formed between the strap 9 and the wearer 7, which thereby provides a much smaller area into which hazards may be inserted.

In the illustrated embodiment of the invention the surface 8 of the lining 3 is defined by a loop-defining material. Alternative releasable arrangements are possible, for example a strap of loop-defining material could be provided on the lining surface adjacent the strap 9, or a press stud could be provided to secure the strap 9 to the lining 3. It is also contemplated that a suitable attachment may be provided by glue, the properties of which have been selected such that the glue will allow the strap 9 to separate from the lining 3 if pulled hard.

In the embodiment of the invention depicted in figure 5, a facing 14 is provided which extends from the strap 9. In use this facing 14 extends between the strap 9 and the head 7 of the wearer, and the inner surface 6 of the lining 3 and the head 7 of the wearer. The facing is attached to the inner surface 6 of the lining 3 by a fastener portion 13, (e.g. hook and loop or glue) causing the strap 9 to conform to the profile of the wearer's head 7, thereby reducing the size of the space 12.

Claims:

1. A helmet having an outer shell defining an inwardly facing surface extending to an edge of the shell, a lining defining an outer surface facing the inwardly facing surface
5 of the shell, an inner surface which in use faces the head of a person wearing the helmet, and an edge surface extending between the inner and outer surfaces of the lining adjacent the edge of the shell, a strap secured to the outer shell and extending from between the inwardly facing surface of the outer shell and the outer surface of the lining, means for releasably attaching a portion of the strap immediately adjacent the lining to the edge
10 surface of the lining, such that the strap adjacent the shell edge is pulled towards the head of the wearer.
2. A helmet as claimed in claim 1, wherein the attaching means comprise a hook and loop fastening.
15
3. A helmet as claimed in claim 1, wherein the attaching means comprise a press-stud fastening.
4. A helmet as claimed in claim 1, wherein the attaching means comprise glue.
20
5. A helmet as claimed in any preceding claim, wherein the strap is provided with a facing that attaches to the inner surface of the lining.
6. A helmet substantially as hereinbefore described with reference to figures 3 and 4,
25 or figure 5 of the accompanying drawings.

Abstract.

A helmet having an outer shell defining an inwardly facing surface extending to an edge of the shell, and a lining defining an outer surface facing the inwardly facing surface of the shell, an inner surface which in use faces the head of a person wearing the helmet, and an edge surface extending between the inner and outer surfaces of the lining adjacent the edge of the shell. A strap is secured to the outer shell and extends from between the inwardly facing surface of the outer shell and the outer surface of the lining. Means such as a hook and loop fastening are provided for releasably attaching a portion of the strap immediately adjacent the lining to the edge surface of the lining, such that the strap adjacent the shell edge is pulled towards the head of the wearer.

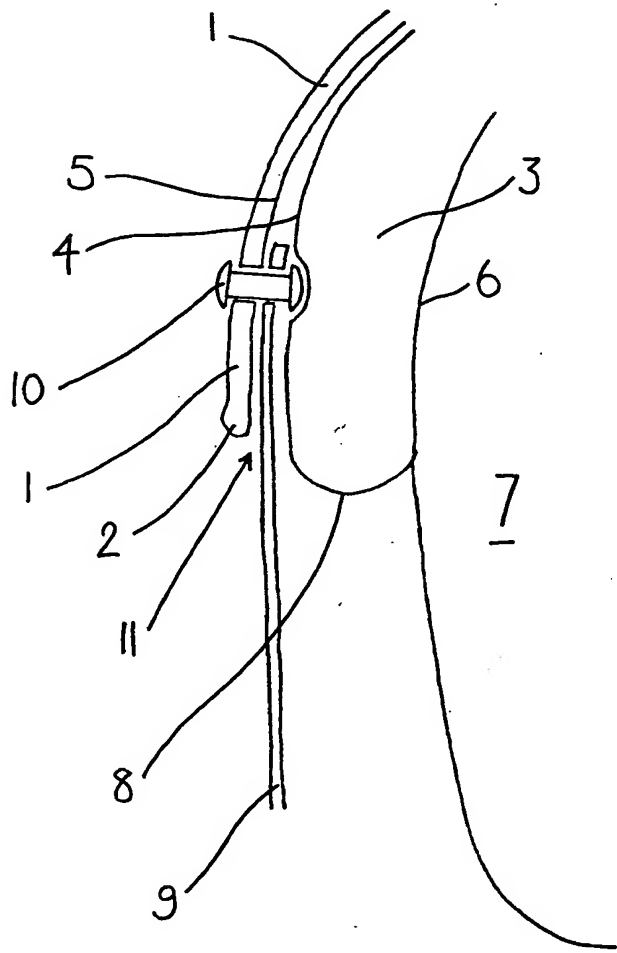


Fig. 1

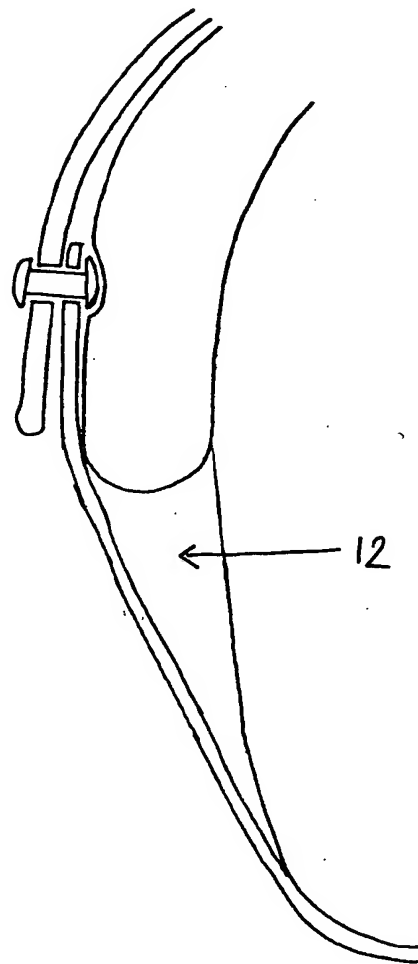


Fig. 2

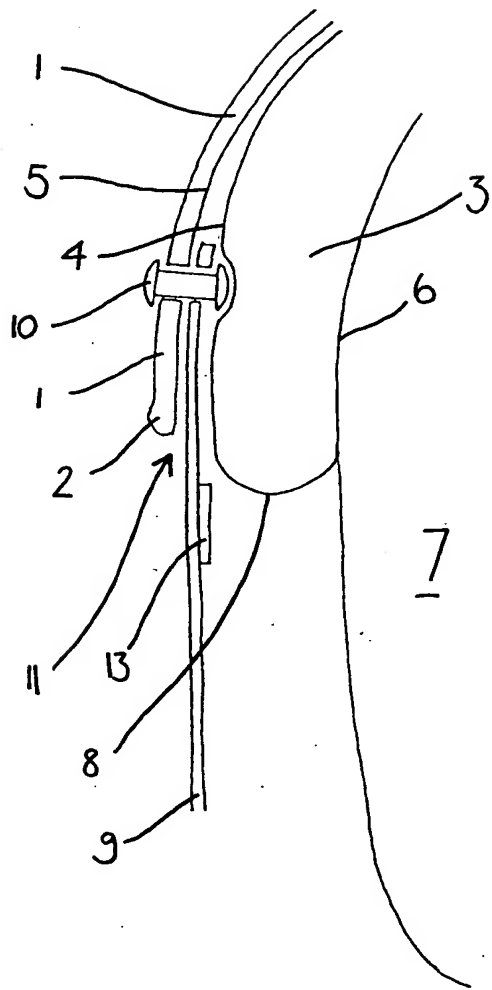


Fig. 3

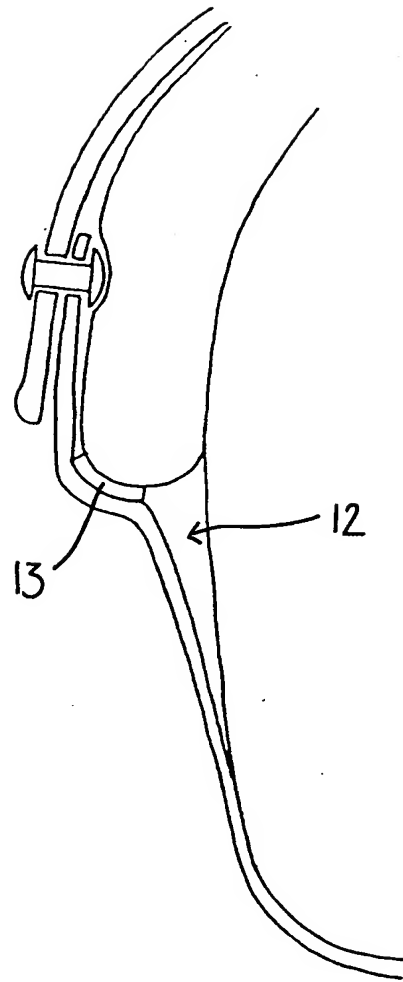


Fig. 4

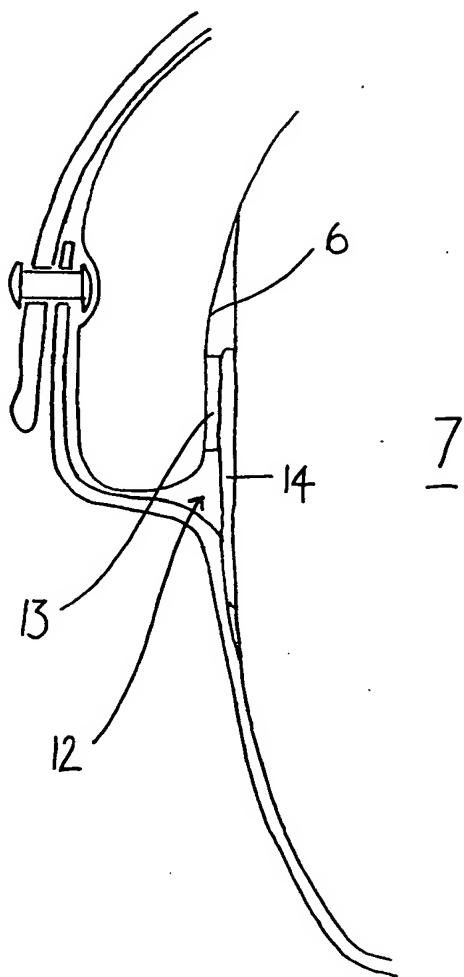


Fig. 5